


TKL89G


Mechanical Gaming Keyboard


Kailh hot swappable switch supports 50M strokes Durable PBT keycaps with excellent typing feel

Product contents









- a. Quick Start Guide
- b. USB cable
- c. Kailh hot swappable switch x2
- d. Keycap and switch puller

FN Key functions

	(35)	Long press to default setting
FN +	Num	Number pad mode (*1)
	÷.	Screen brightness ↓
	* *	Screen brightness ↑
	144	Backward
	►II	Play/Pause
	▶ ▶I	Forward
	ŧ	Screenshot
		Screen lock
	EN .	FN key lock
	WIN	WIN key lock
	A	Mac OS
	S	WIN OS
	: ∳:	RGB backlight brightness ↑ (5 levels)
	*	RGB backlight brightness ↓ (5 levels)
	₹ Ċ	RGB backlight direction adjustment
		RGB backlight color change
	ρ <mark>ῷ</mark> ν	Backlight customization (*2)
	<u>⊗</u> ́	RGB backlight speed ↑
	\odot	RGB backlight speed ↓
	**	Change RGB light effects (18 total)

(*1) NumPad activation:

- 1. Press Fn+ Esc to activate numpad.
- 2. Press Fn +F8 to unlock numpad.

(*2) RGB DIY


- 1. Press FN + ~ (DIY) to activate RGB customization.
- 2. Press FN + ~ (DIY) again, and the LED indication (A) & (1) will flash at the same time.
- 3. There are 9 backlight color modes (including backlight off) to select. Keep pressing the key you would like to customize the RGB backlight color.
- 4. Press FN + ~ (DIY) again to complete the customization setting.

Instructions

Connecting to your PC

- a. Connect the keyboard to the PC using the USB C to USB A cable.
- b. The keyboard will be detected by Windows within 5-30 seconds.
- c. The keyboard is now ready for use.'

■ LED indication



A: CAPS LOCK (blue LED)

1: NUM LOCK (blue LED)

M: Mac OS (blue LED)


*: USB connection (blue LED)

Troubleshooting

Unable to detect keyboard on PC

- Make sure the computer meets the minimum system requirements.
- Try connecting the keyboard to a different USB port on the computer to ensure that the USB cable isn't damaged and is correctly plugged in.
- If the issue persists, enter your computer's settings and make sure the keyboard language is set to match the product's configuration.

Hot swappable keyboard switches

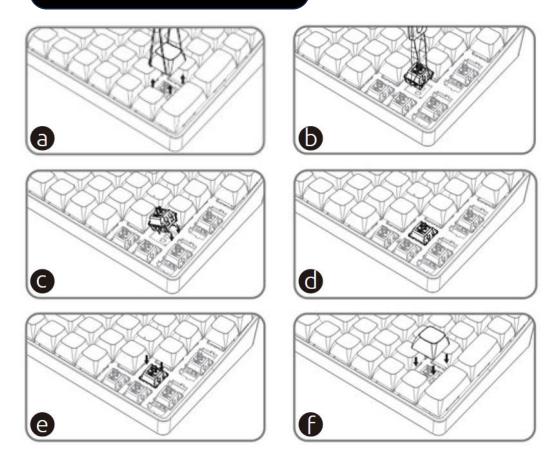

- a. Take off key caps with a keycap puller.
- b. Pull out the switch with a switch puller.
- c. Ensure the shaft of the switch is correctly aligned with the socket.
- d. Accurately place the new switch on the socket.
- e. Gently press the switch into the socket.
- f. Install the key cap back onto the switch.

www.gamiac.com





























